



DEBOFARM

**WE SOURCE ONLY
THE BEST VALUE**

AGRICULTURAL EQUIPMENT



**OVER 3 000
TRACTORS SOLD
IN THE UK
INCREDIBLE
PRICE & INCREDIBLE
SPECIFICATION!**

**Siromer EU approved flat pack tractors
come as standard complete with:**

- High torque tier III water cooled diesel engine.
- Separate power steering pump.
- Semi flat deck floor.
- Side hand throttle.
- Quick release ratchet handbrake.
- Fully electronic dash.
- Dip and main beam headlights.
- Front and rear towing hitch.
- Sprung comfort seat.
- Folding roll bar for ease of storage.
- Hi lift Hydraulics.
- Dual stage clutch.
- Two speed PTO 540/1000 rpm.
- Category 1 three point linkage.
- Selectable four wheel drive.
- Creeper gearbox giving 12 fwd (354E 16fwd) and 4 reverse gears.
- Independent dual double acting spool block.
- Free choice of Agricultural or Turf tyres.

**QUALITY MODEL COMPACT TRACTORS
WITH 4 WHEEL-DRIVE (4WD) AND POWER
STEERING. INCREDIBLE SPECIFICATION AT
AN INCREDIBLE PRICE!**

Siromer tractors are EU approved, Chinese manufactured based on British technology and engineering standards. These fully approved everyday work-horses combine tough design with reliability, durability and performance.

We are confident that these tractors are the best value for money tractors in the market place. The simplicity of operation and modern styling, makes these tractors stand out above all others.

With well over 3 000 tractors all ready sold and working in the UK, the Siromer tractors is proving to be in a class of its own when it comes to compact tractors. Siromer tractors can be found on small and large scale farms and various other environments requiring the pulling or pushing power of a tractor.

There are a wide range of ready-made attachable equipment available for your Siromer compact tractor for common tasks such as: transporting, sweeping, leveling, clearing, spreading, digging, splitting, trimming, cultivating, furrowing, ploughing, hammering, spiking, boring, mowing, wrapping, raking, tipping, harrowing, flattening, lifting, hay making and much more.

When you order your Siromer tractor, our trained engineering technicians will assemble and test your compact tractor in Nigeria. All tractors comes as standard with a one year manufacturer's parts warranty – this is how confident we are of the quality of these tractors. With an established trained engineering workforce in Nigeria, we are able to service your tractor regularly, provide original replacement parts and the necessary user training and customer support; to ensure your compact tractor is always on the job.

All tractors are assembled at our engineering workshop in Oyo state (Nigeria).

Please give us a call

+234 802 757 0456 (NG)

+44 784 170 6889 (UK)



FIELD TRACTORS RANGE: 204S, 304, 404 (20, 30 AND 40 HP 4WD TRACTORS)


204S/304 Entry level tractors built to UK specifications complete with Cat-1 3 point linkage, selectable 4WD, power steering, folding roll bar, option shuttle or creeper gearbox, turf or agricultural tyres, sprung seat, 800kg rear lift capacity.

404 Ideally suited for ground care work. As 304 specification with 4cyl Isuzu 40hp engine, dual Cat-1, Cat-2 rear linkage, dual double acting spool valve and improved quarter turn flow control valve- useful for 3PL post bangers and log splitters.

Field range tractors have the free option of creeper or shuttle gearbox.

Creeper: The tractors can be put into an extremely low gear with twelve forward speeds starting at only 0.2 miles per hour. There is incredible torque at these gear ratios. Ideal for really tough mowing or towing field shelters etc. The main gearbox has a single reverse gear which can be selected in High, Low or Creeper. Reverse is not a fast gear, about 4 miles an hour maximum.

Shuttle: The tractor has a separate dash mounted gear level for Forward/Reverse selection and a main 3 speed gearbox with high/low selection but no creeper gear. Any of the 6 gears can be selected in forward or reverse allowing the tractors to drive at the same speed forwards or backwards. Ideal for scraper or loader work. The slowest shuttle gear, low box first is approximately 1 mile per hour.

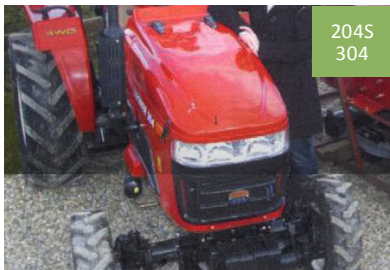

204S
304



204E
244E





404



354E

**WE HAVE COMPLETE
CONFIDENCE IN
OUR TRACTORS
PERFORMANCE.
YOU WILL BE GENUINELY
SURPRISED AT THE
EXCELLENT QUALITY
AND MANY FEATURES
OF OUR TRACTORS.**



Fully electronic dash ratchet handbrake, side hand throttle, power steering and 4wd make driving our range of tractors easy for even the most inexperienced tractor drivers. EU models are fitted with dual double acting spool valves. Rear lift capacity on tractors up to 30hp is 800 kg. The 354E is 1200 kg.

Our tractors can have a free option of Agricultural or Turf Tyres. The choice is yours!

Tractors can be fitted with front loaders and back hoes:

- Parallel lift loaders with 4-in-1 buckets, and muck forks lift 500 kg on the tractors up to 30hp. The 354E front loaders lift up to 650 kg.
- Back hoes have a dig depth up to 1.8 m and rotate a full 160 degrees.

Optional:

- Dual double acting spool valves and extra strong link arms.
- Comfortable, weatherproof high spec seat standard on 404.
- 1/4 turn valve allowing quick and easy change between tipping trailer use and 3p.l. use.

The 4wd axles maintain tight turning circles and excellent ground clearance.



Equipment Sample List



Siromer Back Hoe

Simply swivel the tractor seat and the back hoe controls are at your fingertips.



Siromer Front Loader

Dual action Rams Buckets and muck forks available.



Grader Blade

Ideal for sand school or track levelling and snow clearing.



Perspective

The size of the Siromer tractor can be deceptive. This picture of the Siromer on a test drive gives a good idea of the size.



Tipping Trailer

Complete with tandem axle and 10" floatation tyres 8'x 4'. Two ton.



Finishing Mower

Four wheeled finishing mowers for private estates, lawns and general maintenance.



Weed Control

With the 200 l sprayer.



Hedge Trimmer

Available with various size flail.



Pasture Topper

Cat 1 three point hitch and PTO shaft for 540 rev operation. Gets rid of docks and thistles, lets fresh grass through for your stock. Inline or semi-offset.



Heavy Grass Chain Harrow

all sizes available

Trailed or mounted heavy grassland chain harrow (2.3 m deep with width in 1 m steps) Constructed from 12 mm dia high tensile steel with 63 mm tines. A good harrowing is worth a spread of fertilizer.



Ballast Roller

all sizes available

Constructed from quarter inch steel with filler plug for ballast (water + anti-freeze). Firm in those roots to get the grass growing early in spring.



1.5 m Manual Tipping Backbox

Incredible specification at an incredible price. Fill in, Cart it, Tip it. Throw away that wheelbarrow.



Post Hole Barer

Choice of 6", 9" or 12"

Complete with Auger and PTO shaft replaceable tips. The best value PHB on the market. Lay that rubber mallet to rest.



Rotary Cultivator

Semi offset. Complete with 30 blades and PTO shaft (540 rpm)



Flail Mower

Makes light work of tough grass on rough terrain. Complete with blades or hammers, rear roller and PTO shaft (540 rpm)



For more information

Please give us a call

+234 802 757 0456 (Nigeria)

+44 784 170 6889 (UK)

If the equipment you are looking for is not listed above – please contact us.

We are able to source and import various agricultural equipment at competitive rates.

Main Technical Specification for Siromer Tractors

Engine		Vertical, water cooled, 4 stroke Diesel
Number of Cylinders		204S, 304, 204E, 244E:3, 354E, 404:4
Engine Shutoff		Fuel cut off with pull to stop control
Cold Start		Pre-heaters
Electrical System		Negative pole, Loom Fused
Battery Size		12 Volt, 100 AH
Lights		Front, Rear, Break, Indicator, Reverse / Working, Beacon
Horn		Electric
Gauges/ Indicators		Oil Pressure, Engine Temperature, Ammeter, Rev Counter, Hour Meter, Fuel Gauge
Braking System		In board Disc
Foot Brake		Selectable: Combined / Independent left and right
Hand Brake		Locked Foot Brake (EU range Ratchet handbrake)
Clutch		Dual Stage Multi Disc
First Stage		Main drive
Second Stage		PTO
Drive Train		4 wheel / 2 wheel drive (engage / disengage)
Steering		Hydraulic Ram, Hydrostatic
Differential Lock		Selectable engage / disengage
Number of Speeds		12 Fwd 4 Rev (3+1 High / Low and creeper)
1st Forward		1.73 km / hr (0.32 with creeper)
2nd Forward		3.42 km / hr (0.64 with creeper)
3rd Forward		5.70 km / hr (1.06 with creeper)
4th Forward		7.99 km / hr (1.40 with creeper)
5th Forward		15.79 km / hr (2.94 with creeper)
6th Forward		26.35 km / hr (4.91 with creeper)
1st Reverse		1.37 km / hr (0.26 with creeper)
2nd Reverse		6.34 km / hr (1.18 with creeper)
PTO		Semi-independent dual speed
High/Low		1000/540 rpm
3 Point Hitch		Category 1, Standard 800 kg 753 mm (404: Cat 1 + Cat 2) (354: 1200kg)
Hydraulic Pressure		2200 psi, 25 litres / min (404:3000 psi, 323 litres / min
Hydraulic Service		Single Acting, 404 & EU: Dual Double acting spool

Dimensions	204S / 304	404	204E / 244E	354E
Weight	1100 kg	1200 kg	1650 kg	2250 kg
Length	2991 mm	2900 mm	2695 mm	3352 mm
Height Roll Bar Folded	2200mm 1650 mm	2300 mm 1750 mm	2350 mm 1870 mm	2420 mm
Track Width	1500 mm 1370 NrAg	1700 mm	Adjustable 1370- 1675	Adjustable 1485- 1785
Wheel Base	1645 mm	1675 mm	1560 mm	1833.5 mm
Turning Radius	2.8 m	3.0 m	3.2 m	4.15 m
Tyres				
Standard Chinese	6.0-12:8.3-24	n/a	6.0-12:8.3-24	7.50-16:11.2-24
Wide Ag	6.0-12:12.5-18	6.0-12:12.5-18	6.0-12:12.5-18	n/a
Turf	7.50-12:11.2-20	7.50-12:11.2-20	7.5-12:11.2-20	9.50-16:13-20

DEBOFARM

Gateway House. Ogbomosho. Oyo State. Nigeria

+234 802 757 0456 / +234 703 805 4155 (NG) +44 784 170 6889 (UK)

WWW.DEBOFARM.COM.NG